
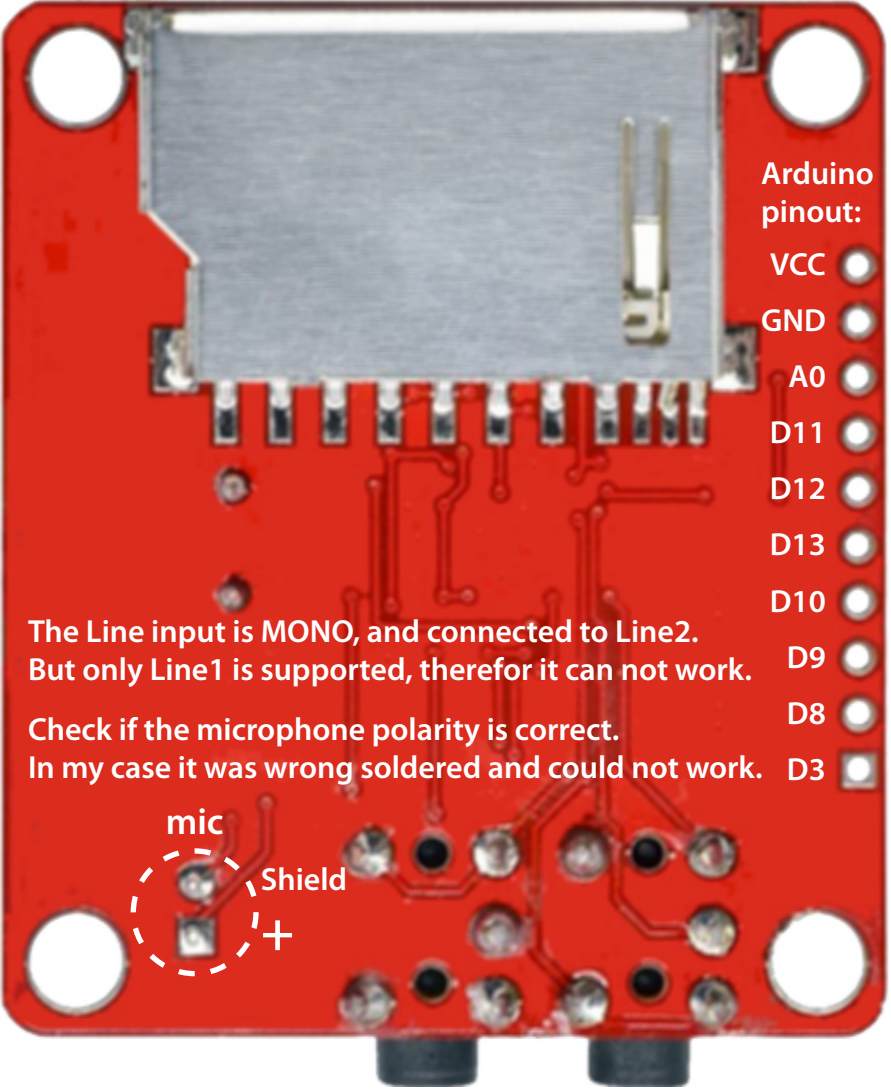


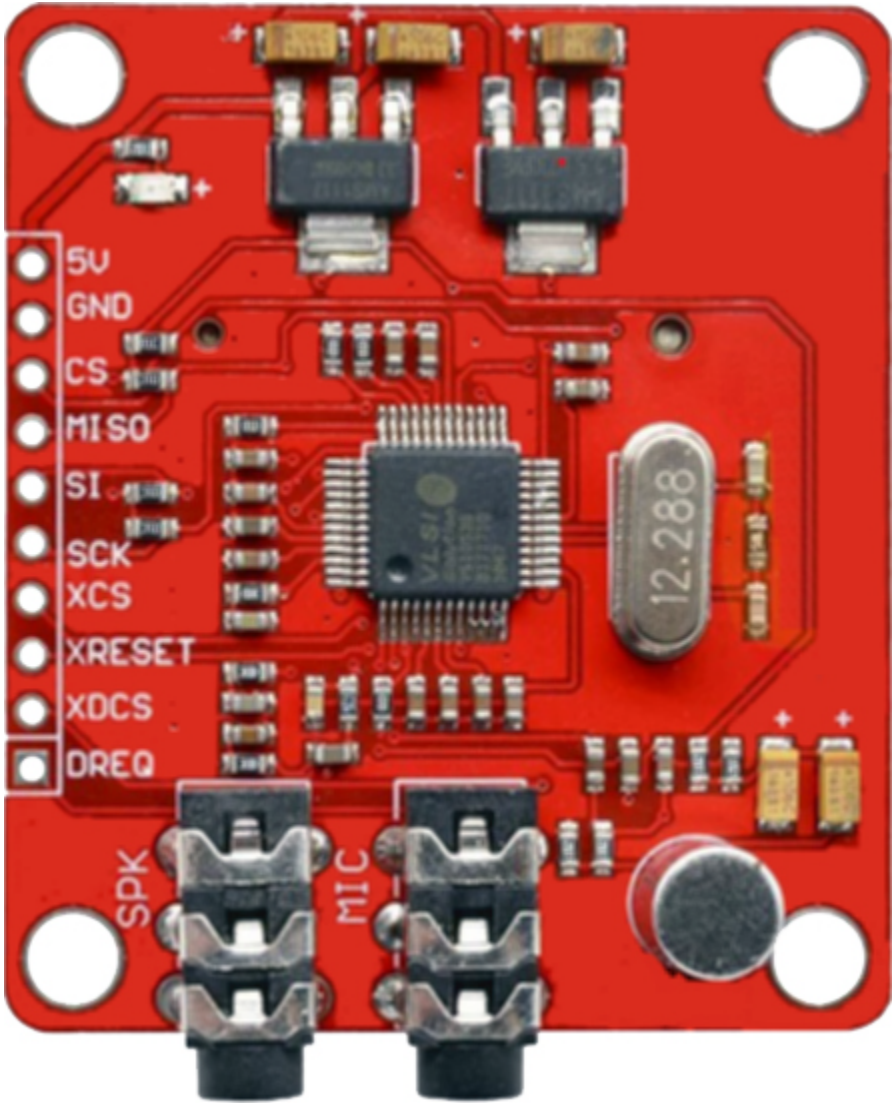

Make sure the plugin image "v08k1q05.img" is present on your SD card.
If not, you'll find it here: https://www.vlsi.fi/fileadmin/software/VS10XX/vs1053-vorbis-encoder-170c.zip

Arduino pinout:

A0 = CS	**SDCard chip select pin**
D9 = XRESET	**VS1053 reset pin**
D10 = XCS	**VS1053 chip select pin (output)**
D8 = XDCS	**VS1053 Data/command select pin (output)**
D3 = DREQ	**VS1053 Data request, ideally an Interrupt pin**
D11 = MOSI	**SPI serial in pin**
D12 = MISO	**SPI serial out pin**
D13 = SCK	**SPI clock pin**
D7 = REC. BUTTON	**Momentary switch to ground**